BLACK WALNUT steamed - CHERRY natural | steamed - ELM steamed

MAPLE - OAK - PEAR steamed - SMOKED OAK - SMOKED ZIRNOAK



Woodtype SMOKED OAK european heart-smoked

Description 3 layers of the same hardwood. The European Oak receives a blackish-brown

> colour due to a special fumigation procedure. Special features are the streaky colour differences (light | dark). The sorting Design is slightly to very

knotty, with a lively structure.

Brinell hardness 4,2 kp Gross density 0,71 g | cm<sup>3</sup>

## 1-Strip Country House Flooring SMOKED OAK european Design "Genf"



## Oberflächen

Oil | wax oxidative dried

✓ Untreated sanded




Sorting guidelines	
Healthy knots	allowed (partly filled)
Black knots	allowed (partly filled)
Healthy red heart	not allowed
Healthy black heart	not allowed
Cracks	allowed (partly filled)
Curled Spots   differences in structure	allowed
Natural colour differences	allowed
Natural fiber orientation	allowed
Wormholes and insect-ate-spots	not allowed are allowed in middle layer and back layer**
Sapwood	partly allowed
Red or brown spots	allowed
Stains from storage and light blueness	allowed
Knocked spots	not allowed
Mirror	alongside and crosswise allowed

		Sym	bol picture - may vary in colour and structure	
Technical data				
Thickness 15 mm Width 150 mm		Useful layer approx. 5 mm		
Length			6 layers 1900 mm 2 layers 950* mm	
Connection Tongue and groove Due to the technical drying, there are no longer any pests, only the holes in the middle One layer 950* mm consists of 2 boards layer and back layer**				
m² pkg.	2,28	r	m² pal. 111,72	
kg pkg.	23	k	(g pal. 1127	
✓ Floating laying				
☑ Glued Id	aying			

✓ Suitable for underfloor heating

when gluing the entire area with solvent-free adhesives

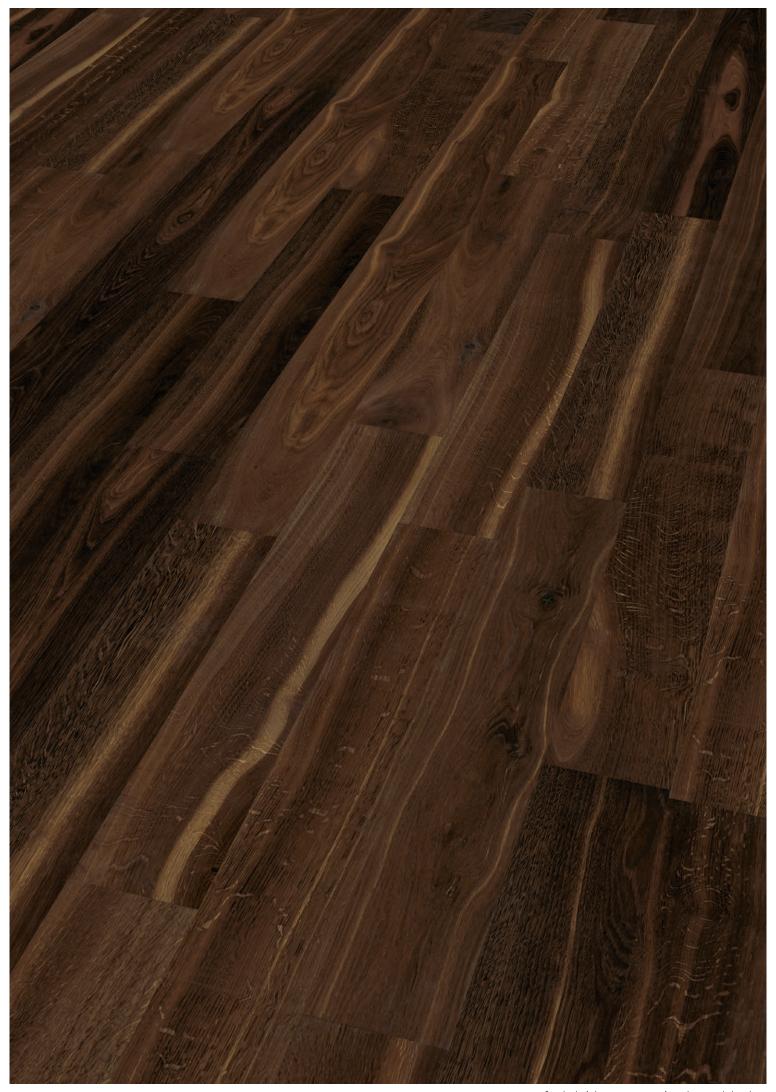

Symbol picture - may vary in colour and structure